


# SLOAN *FLUSHMATE*®


30075 Research Drive New Hudson, MI 48165 1-800-533-3460  
Genuine *Flushmate*® Repair Parts

## ST 100100 2 IN 1 WRENCH

TO REMOVE THE CARTRIDGE ASSEMBLY FROM THE FLUSHMATE UNIT, REMOVE THE INDEPENDENT ADJUSTER FROM THE TOP OF THE CARTRIDGE ASSEMBLY AND INSERT THE WRENCH INTO THE TOP CAP AS SHOWN IN THE DIAGRAM BELOW AND TURN IN A COUNTER CLOCKWISE DIRECTION UNTIL IT CAN BE REMOVED BY HAND. TO INSTALL, REVERSE THE REMOVAL PROCESS.

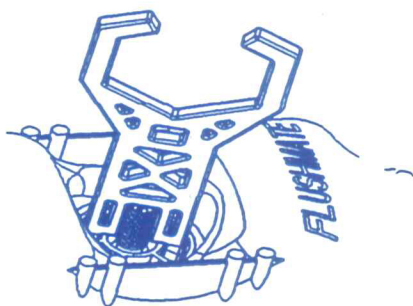

TO REMOVE THE LOCKNUT FROM THE BOTTOM OF THE TANK, PLACE THE WRENCH, AS SHOWN IN THE DIAGRAM BELOW, ON THE LOCKNUT AND TURN IN A COUNTER CLOCKWISE DIRECTION UNTIL IT CAN BE REMOVED BY HAND. TO INSTALL, REVERSE THE REMOVAL PROCESS.

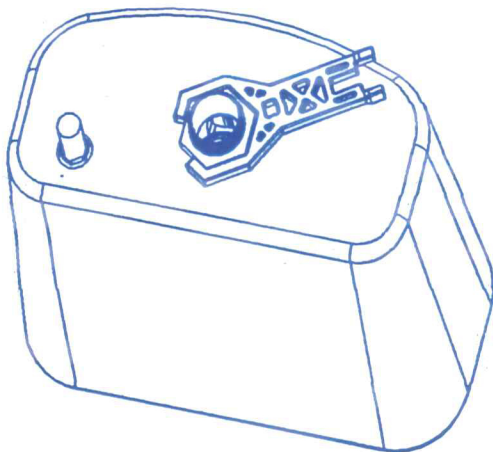

0 64871 45002 9